


CAST ALUMINUM HEAT SLINGERS


Option A

- 2 Set Screws @
60° or 120°

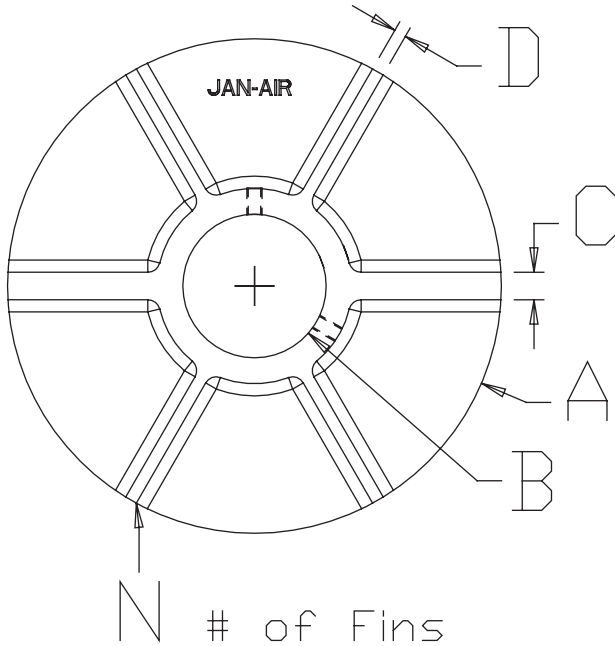


Option B

- Split Heat Slinger with 2 Bolts, 2
Lock Washers, 2 Nuts^o

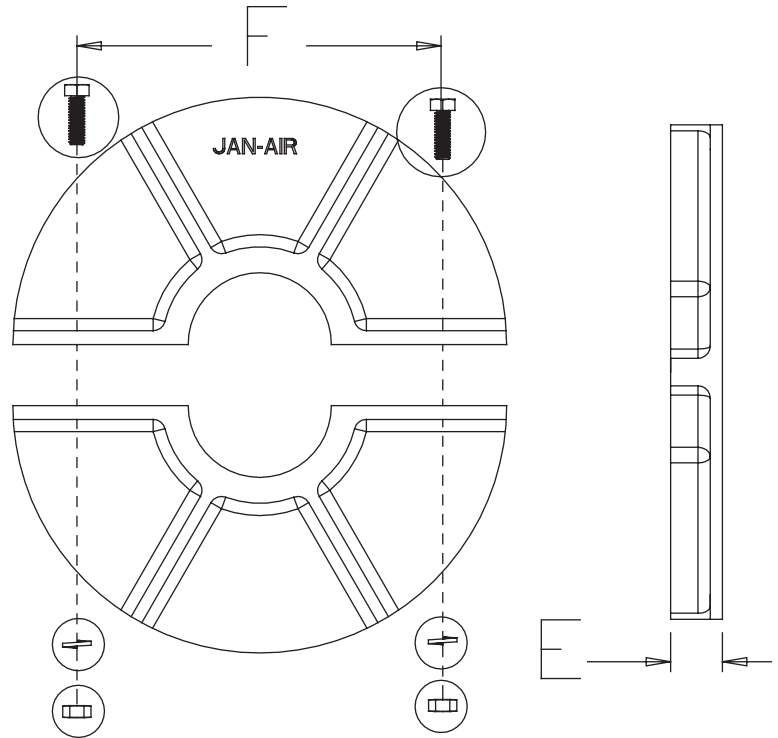

SIZE	ID-MIN	ID-MAX	FIN THICKNESSES		THK	FINS	SET SCREWS		SPLIT AVAIL.	SPLIT
A	B	B	C	D	E	N	QTY	ANG		F
4- ³ / ₄	¹ / ₂	1	¹ / ₈	¹ / ₈	⁵ / ₈	7	1	-	NO	-
6	¹ / ₂	2- ⁷ / ₁₆	⁷ / ₁₆	³ / ₁₆	⁷ / ₈	6	2	120°	YES	4- ¹ / ₂
7- ¹ / ₂	¹ / ₂	2- ⁷ / ₁₆	⁷ / ₁₆	³ / ₁₆	⁷ / ₈	6	2	120°	YES	5- ¹ / ₂
10	1	3- ⁷ / ₁₆	⁵ / ₈	¹ / ₄	1- ¹ / ₁₆	6	2	120°	YES	7- ¹ / ₂

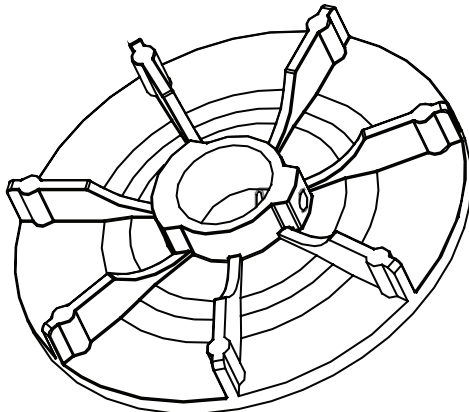

4-3/4" size is shown in the picture to the left. Critical dimensions are referenced on the diagram above.